



# MMC PRESSES 160 THRU 800 TON SX2-G PRESSES

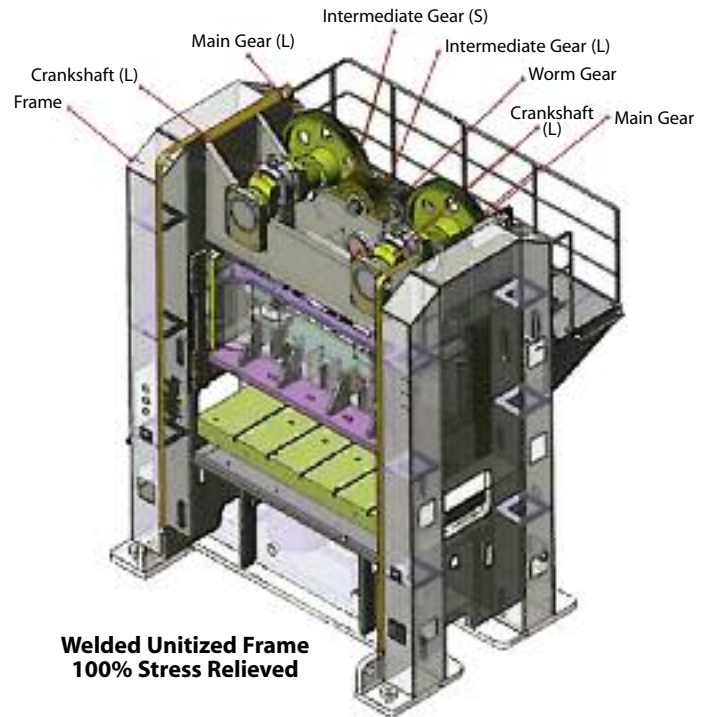

**8-Point Slide Guideway With Bronze Alloy Lining**

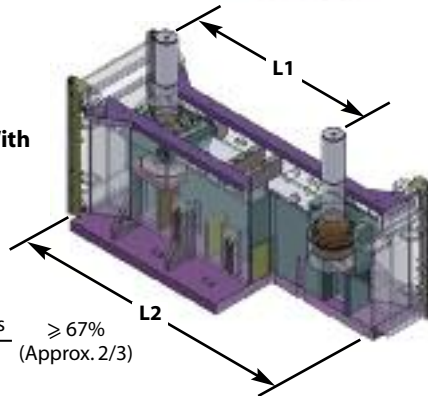

$$\frac{L1 = \text{Distance Between Points}}{L2 = \text{Slide Plate Length}} \geq 67\% \text{ (Approx. 2/3)}$$



**Air-Actuated Wet Clutch (Built Into Flywheel)**

SX2-G SERIES SINGLE ACTION, DOUBLE CRANK, 2-POINT, MECHANICAL UNITIZED FRAME PRESSES																	
Model		SX2-1600G		SX2-2000G		SX2-2500G		SX2-3000G		SX2-4000G		SX2-5000G		SX2-6300G		SX2-8000G	
<b>Capacity</b>	kN	1600		2000		2500		3000		4000		5000		6300		8000	
<b>Stroke Length</b>	mm	180	130	250	150	280	150	300	150	300	150	300	150	300	150	300	150
<b>Strokes Per Minute</b>		30-55	40-85	20-50	35-70	20-40	30-60	20-40	30-60	20-40	30-60	20-40	30-60	20-40	30-60	20-40	30-60
<b>Rated Tonnage Pt.</b>	mm	6	33	6	3	7	3	7	3	7	3	9	4	9	4	10	5
<b>Shutheight (SDAU)</b>	mm	450	400	500	400	500	400	500	400	500	400	550	400	600	450	600	450
<b>Slide Adjustment</b>	mm	100		120		120		120		120		150		150		150	
<b>Slide/Bolster Area (R-L x F-B)</b>	1	1600 x 750		1600 x 750		1800 x 900		2100 x 1000		2100 x 1000		2100 x 1000		2100 x 1000		2100 x 1000	
	2	1800 x 750		1800 x 750		2100 x 900		2400 x 1000		2400 x 1000		2500 x 1000		2500 x 1200		2500 x 1200	
	3	2100 x 750		2100 x 940		2400 x 1000		2800 x 1000		2800 x 1000		2800 x 1000		3000 x 1200		3000 x 1200	
	4	2400 x 940		2400 x 940		2800 x 1200		3100 x 1000		3100 x 1000		3100 x 1000		3400 x 1200		3400 x 1200	

All specifications are subject to change without notice. If you have critical dimensions that must be maintained, please confirm before ordering.

# 004

# MMC PRESSES

## 400 THRU 1200 TON SX2, SE2 & SE4 PRESSES



### SX2-SERIES STRAIGHTSIDE, DOUBLE CRANK, MECHANICAL TIE-ROD PRESSES

Model		SX2-4000		SX2-5000		SX2-6000		SX2-8000		SX2-10000	
Type		L	H	L	H	L	H	L	H	L	H
Capacity	kN	4000		5000		6000		8000		10,000	
Stroke Length	mm	300	200	300	200	400	200	400	200	400	200
S.P.M.	Fixed	22	—	20	—	20	—	20	—	20	—
	Variable	20-40	30-60	20-40	30-60	20-40	25-50	10-30	25-35	10-30	25-35
Rated Tonnage Pt.	mm	7	4	9	4.5	9	5	13	6.5	13	6.5
Shutheight (SDAU)	mm	600		700		700		700		700	
Slide Adjustment	mm	250		250		250		250		250	
Slide/Bolster Area (R-L x F-B)	1	2500 x 1200		3100 x 1400		3100 x 1400		3700 x 1550		3700 x 1550	
	2	3100 x 1400		3400 x 1400		3400 x 1400		4000 x 1550		4000 x 1550	
	3	3400 x 1400		3700 x 1550		3700 x 1550		4600 x 1700		4600 x 1700	

### SE2-SERIES SINGLE ACTION, ECCENTRIC GEAR, 2-POINT, MECHANICAL TIE-ROD PRESSES

Model		SE2-2500	SE2-3000	SE2-4000	SE2-5000	SE2-5000	SE2-6000	SE2-6000	SE2-8000	SE2-10000	SE2-12000
Capacity	kN	2500	3000	4000	5000	5000	6000	6000	8000	10,000	12,000
Stroke Length	mm	400	400	500	500	250	250	500	500	500	500
Strokes Per Minute		10-20	10-20	10-20	10-20	20-40	20-40	10-20	10-20	10-20	10-20
Rated Tonnage Pt.	mm	10	10	13	13	6	6	13	13	13	13
Shutheight (SDAU)	mm	800	800	900	900	800	800	1000	1000	1000	1000
Slide Adjustment	mm	300	300	400	400	400	400	400	400	400	400
Slide/Bolster Area (R-L x F-B)	1	2500 x 1300		2500 x 1400		2500 x 1400		3000 x 1500		3000 x 1600	
	2	2800 x 1300		2800 x 1500		2800 x 1500		3000 x 1500		3400 x 1600	
	3	3000 x 1300		3000 x 1500		3000 x 1500		3600 x 1500		3800 x 1600	

### SE4-SERIES SINGLE ACTION, ECCENTRIC GEAR, 4-POINT, MECHANICAL TIE-ROD PRESSES

Model		SE4-4000	SE4-5000	SE4-6300	SE4-6300	SE4-8000	SE4-8000	SE4-10,000
Capacity	kN	4000	5000	6300	6300	8000	8000	10,000
Stroke Length	mm	500	500	600	250	250	800	800
Strokes Per Minute		10-20	10-20	10-20	20-60	20-60	10-18	10-18
Rated Tonnage Pt.	mm	13	13	13	6	10	13	13
Shutheight (SDAU)	mm	1100	1100	1100	1000	1000	1300	1300
Slide Adjustment	mm	500	500	500	400	400	600	600
Slide/Bolster Area (R-L x F-B)	1	3000 x 2000		3500 x 2000		4000 x 2000		4000 x 2200
	2	3500 x 2000		4000 x 2200		4500 x 2200		4600 x 2500
	3	4000 x 2000		4600 x 2200		5000 x 2500		5000 x 2500

All specifications are subject to change without notice. If you have critical dimensions that must be maintained, please confirm before ordering.

# 005