



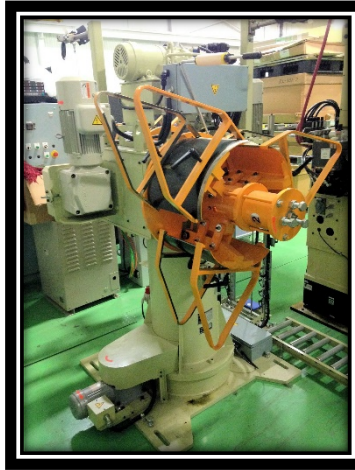

Kyori Anex-125SH High Speed Knuckle Link Straight Side Press

New 2013

NPA Stock #200143P – s/n 189012

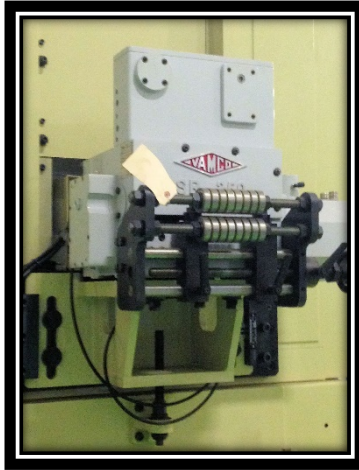

Photos of actual machine

Press Specifications:

- 137 U.S. Tons Capacity (1250 kN)
- 1.18 in. Stroke (30mm)
- 3.15 in. Slide Adjustment (80 mm)
- 16.90 in. / 18.11 in. Shutheight, (430 mm / 460 mm)
- 42.50 x 23.60 in. Slide Area (1080 x 600 mm)
- 47.25 x 35.40 in. Bed Area (1200 x 900 mm)
- 41.33 x 13.70 in. Bed Opening (1050 x 350 mm)
- 38.60 in. x 10.24 in. Bolster Opening (980 x 260 mm)
- 20.00 in. Upright Opening (510 mm)
- 100 – 400 SPM Speed Range
- 49.50 HP, Main Motor (37 kW)

Features:

- Symmetrical Link Design · Link Slide Motion
- Dynamic Balancer · Cast Iron Frame
- Combination Air Clutch and Brake
- Motorized Slide Adjustment
- Recirculating Oil Lubrication System
- Inverter Type Main · Motor Die Doors

Equipped With:

- Operator Control Station with 10.4 in. Touch Panel
 - Speed Meter · Electronic 9-Digit Total Counter
 - Electronic 9-Digit Preset Counter
 - Die Height Adjustment Meter
 - Electronic 7-Digit Hour Meter
 - Main Motor Function
 - Tool Parameter Storage Up to 99 Tools
 - Periodic Maintenance Announcements
 - Fault History
 - Automatic Control of Heater/Chiller Unit
- Quick Access Feature
- **Vamco SR-250 Servo Roll Feed**
 - 9.84 in. / 250 mm Maximum Stock Width
 - 0.157 / 4 mm Maximum Material Thickness
 - 500 Indexes per minute

Also includes Matsumoto MMTS-150SP Stock Straightener and LMU25-1WMHRSP Uncoiler.

Note: All specifications contained herein are as the machine was originally manufactured and are subject to change at time of inspection.

Price, Ex Works Minster, OH: Price On Request

Contact:

Richard S. Ruck, Used Equipment Manager
567-644-5037 • richard.ruck@nidecpa.com

Nidec Press & Automation

240 West Fifth Street
Minster, OH 45865
419-628-2331 • www.nidecpa.com