




Refurbished Minster P2-30-24 Eccentric Shaft Straightside Press

New 1957 – Refurbished 2019

NPA Stock #100265P – s/n 11411

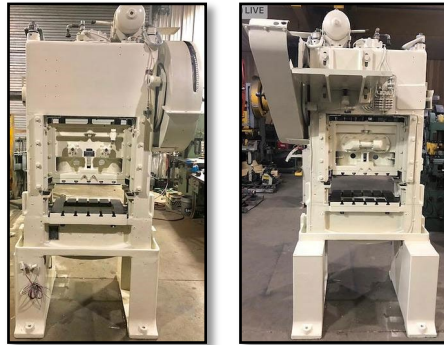

Photos of actual machine

Press Specifications:

- 30 U.S. Tons Capacity 267 kN)
- 2.00 in. Stroke (51 mm)
- 2.00 in. Slide Adjustment (51 mm)
- 11.00 in. Shutheight, SDAU, on Bed (279 mm)
- 24.00 x 12.00 in. Slide (610 mm x 309 mm)
- 24.00 x 19.00 in. Bed Area (610 mm x 483 mm)
- 18.00 x 7.00 in. Bed Opening (457 mm x 179 mm)
- 38.00 in. Distance, Floor to Top of Bed (965 mm)
- 26.00 in. Between Gibs (660 mm)
- 12.00 in. Upright Opening (305 mm)
- 50 – 150 SPM
- 7.5 HP Eddy Current Drive Motor (5.6 kW)
- 440 VAC, 60 hz, 3 ph incoming power

Equipped With:

- Flywheel Type arranged for manual bumping
- Right hand drive with extension on opposite end
- Cast Four Piece Frame
- Drip troughs cast integral with bed
- Minster Combination Air Clutch & Brake
- Pneumatic Counterbalance
- Long barrel type Manual Slide Adjustment
- Recirculating Lube System
- Eddy Current Drive
- Wintriss Press Control
- Wintriss SmartPAC Press Automation Controller
 - 8 Channel DiProPAC
 - 8 Channel ProCamPAC
- Wintriss AutoSet 1500
- CWP ServoMatic LT Electronic Roll Feed
 - 4.00 in. Maximum Material Width (102 mm)
 - 0.062 in. Maximum Material Thickness (1.57 mm)

Note: All specifications contained herein are as the machine was originally manufactured and are subject to change at time of inspection.

Price Ex Works, Ringwood, NJ:Price On Request

Contact:

Richard S. Ruck, Used Equipment Manager
567-644-5037 • richard.ruck@nidecpa.com

Nidec Press & Automation

240 West Fifth Street
Minster, OH 45865
419-628-2331 • www.nidecpa.com